



Features:

wide AC input / 160-264AC
Optional active PFC function
Can use as 2 Stage battery Charger
Protection: Short circuit / Overload / Over Voltage
Protection by internal fuse
On/Off control Fan, Charging Fan
Optional Relay contact signal output for AC OK
Optional Remote ON-Off control
Optional active current sharing up to (3+1)
Cooling by free air convection(400W)
100% full load burn-in test
2 years warranty

Applications:

Security systems
Emergency Lighting system
Alarm system
UPS system
Central monitoring system
Access systems



600-220PSU series is a 600W AC/DC security power supply, allowing the input range between 170VAC and 264VAC and incorporating optional PFC function. In addition to primary output, there is a charger output, with the smaller rated current, that provides the backup power supply application the security access system require.

600-220PSU delivers an efficiency up to 90%; It can operate with air convection under -20°C through +70°C. This series is designed with thorough alarm features, can adding AC OK signaling; Morever, the relay contact is provided to facilitate users system designs.











Tel.: (+98-21) 88552015 website: www.dcmodified.com

600-220PSU

MODEL		600-220PSU12	600-220PSU24	600-220PSU48	600-220PSU110
	OUTPUT NUMBER	CH1	CH1	CH1	CH1
OUTPUT	DC VOLTAGE	12.0V	24.0V	48.0V	110.0V
	RATED CURRENT	50A	25A	12.5A	5.5A
	CURRENT RANGE	0~50A	0~25A	0~12.5A	0~5.5A
	RATED POWER	580W	572W	590W	610W
	RIPPLE & NOISE(Note2)	150mVp-p	150mVp-p	150mVp-p	150mVp-p
	VOLTAGE ADJ. RANGE	CH1: 12~15V	CH1: 24~29V	CH1: 47~59V	CH1: 100~120V
	VOLTAGE TOLERANCE(Note2)	±1.0%	±1.0%	±1.0%	±1.0%
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%
	LOAD REGULATION	±0.5%	±0.5%	±0.5%	±0.5%
	SETUP,RISE TIME Note.4	2000ms, 30ms/230VAC2000ms at full Load			
	HOLD UP TIME	40ms/230VAC at full Load			
INPUT	VOLTAGE RANGE	175~265VAC			
	FREQUENCY RANGE	47~63Hz			
	POWER FACTOR (Typ.)	Without PFC circuit PF≥0.65/230VAC at full Load			
	EFFICIENCY (Typ.)	84%	86%	87%	89%
	AC CURRENT (Typ.)	12A/115VAC 8A/23		1 51 75	15575
	INRUSH CURRENT (Typ.)	COLD START 35A/115VAC 80A/230AC			
	LEAKAGE CURRENT	≤1mA/240VAC			
	LEANAGE CONNENT	101~105% rated output power			
PROTECTION	OVERLOAD	Protection type: Constant current Limiting, recovers automatically after fault condition is remove			
		14.49~18.63VDC	28.98~37.26VDC	55.49~60.63VDC	120~135VDC
	OVER VOLTAGE		own o/p voltage , re-pow		1.20 1.001.20
	OVER TEMP CONTROL				
ALARM FUNCTION	AC OK Note.5	OPTIONAL Relay contact output, ON: AC Okay; OFF: AC Fail; Max Rating: 30V-1A			
	Remote On/Off control	OPTIONAL Normal working CN3 is open, PSU is off if CN3 is short			
ENVIRONMENT	WORKING TEMP.	-20~+70°C REFER TO DERATING CURVE			
	WORKING HUMIDITY	20~90% RH non-condensing			
	STORAGE TEMP., HUMIDITY	-20~+85°C , 10~90% RH			
	TEMP. COEFFICIENT	±0.03% /°C (0~45°C) on CH1 Output			
	VIBRATION	10~500Hz 2G 10min./ 1cycle, 60min each along X,Y,Z			
SAFETY & EMC (NOTE4)	SAFETY STANDARD	UL60950-1, TUV EN60950-1, EAC TP TC 004 approved			
	WITHSTAND VOLTAGE	I/P-O/P: 3KVAC I/P-FG: 2.0KVAC O/P-FG: 0.5KVAC			
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG , O/P-FG : 100MΩ / 500VDC / 25°C / 70%RH			
	EMC EMISSION	Compliance EN55032 (CISPR32) Class B, EN61000-3-2, -3, EAC TP TC 020			
	EMC IMMUNITY	Compliance EN61000-4-2,3,4,5,6,8,11, EN55024, light industry level, criteria A			
OTHERS	MTBF	257K hrs. min. MIL-HDBK-217F (25°C)			
	DIMENSION	250*130*64mm			
	PACKING	2.3Kg; 6pcs/14 Kg			
NOTE	 All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temp Ripple & noise are measured at 20MHz of bandwidth by using 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor Tolerance: includes set up tolerance. Line regulation and load regulation. Length of set up time is measured at first cold start. Tuning ON/OFF the power supply may lead to increase of the set-up time., Please refer to suggested application The power supply is considered a component which will be installed into final equipment. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to EMI testing of components power supplier 				














■ Derating Curve

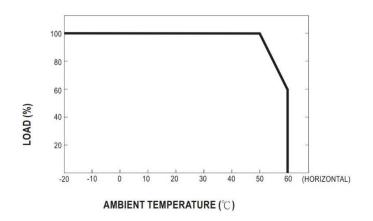

■ Output Derating VS Input Voltage

